


Dongguan Hai Mi Electronic Technology Limited.

DC Brushless Water Pump


◎ Product Parameter								
Model Character			HM651205-4 (Three phase pump)					
Working voltage range			9VDC-13.5VDC					
Rated voltage			12VDC					
Rated power			≤5W					
Max static water head			1.6±10% Meters					
Static flow rate			>550mL/min@1.2m					
Lifespan			Continuous operation under normal working surrounding>20000H					
Working Environment			PH value: PH5-10(weak acid and weak base), workable both in water and on land.					
Max noise			Under normal working condition,(1meter over the test instrument)<30dB					
Max working temperature			Under room temperature surroundings, fluid medium temperature≤70℃					
Other optional special functions			Water shortage protection, over-voltage protection, over-current protection, blocking protection, 0-5V speed control, PWM speed control, FG signal feedback, etc.					
Application			Air conditioner drainage system, portable air conditioner drainage system, small electrical appliance drainage system, potted plant decoration, hydroponics, humidifier, small fountain, aquarium, small medical equipment, handicrafts, etc.					
Color			Black (Can be customized according to customer's requirement)					
Outlet direction			Can be adjustable at any angle					
Dimension			IP grade	Inlet		Outlet		Remarks
Length (mm)	Width (mm)	Height (mm)		OD (mm)	ID (mm)	OD (mm)	ID (mm)	Outlet has anti-slip strip.
98.0	82.0	76.0		20.0	10.5	16.0	9.0	

Dongguan Hai Mi Electronic Technology Limited.

⊙ Outside View

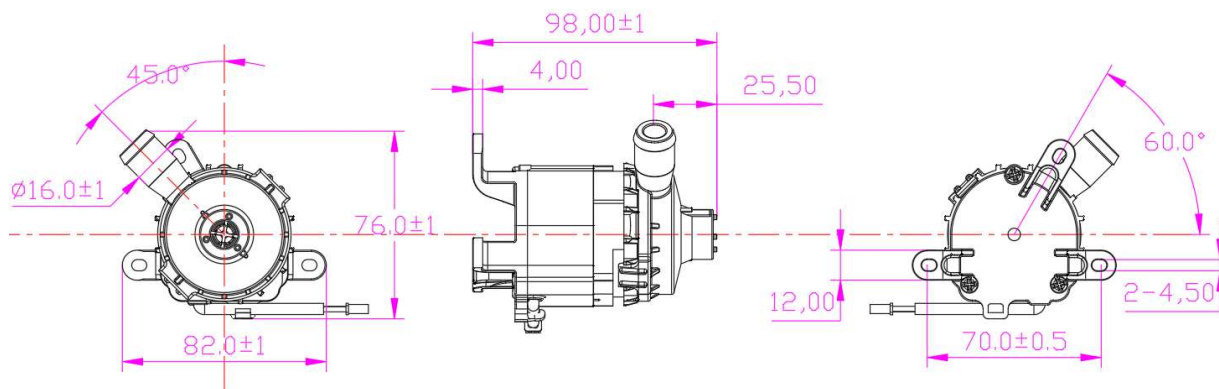

⊙ Curve Graph

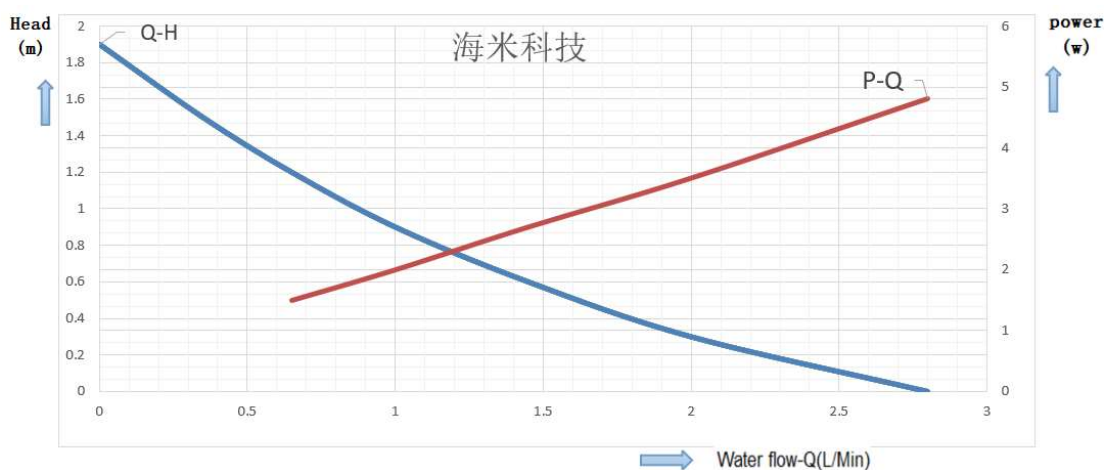

Remarks: The graph is just for your reference, the final one comes with the customer required specifications.

⊙ Photo for your reference

