

Dongguan Hai Mi Electronic Technology Limited.

DC Brushless Water Pump


Product Parameter

Model Character	HM2506-1
Working voltage range	5VDC-24VDC
Optional rated power	0.5~4W
Optional static water head	0.5~2.5 meters
Optional static flow rate	0.5 ~ 3L/min
Lifespan	Continuous operation under normal working surrounding>20000H
Working Environment	PH value: PH5-10(weak acid and weak base), workable in water and on land.
Max noise	Under normal working condition,(1meter over the test instrument)<35dB
Other optional special functions	Water shortage protection, over-voltage protection, over-current protection, blocking protection, 0-5V speed control, PWM speed control, FG signal feedback, etc.
Max working temperature	Under room temperature surroundings, fluid medium temperature≤70℃
Application	Drainage function for small appliances,water dispenser, humidifier, pet drinking water dispenser, small fountain, aquarium, solar water circulation system, soil-less cultivation, hydroponics, Decorative potted plants,foot bath basin, small medical equipment, crafts, etc.
Color	White (Can be customized according to customer's requirement)
Outlet direction	Can be adjustable at any angle


Dimension			IP grade	Inlet		Outlet		Remarks
Length (mm)	Width (mm)	Height (mm)		OD (mm)	ID (mm)	OD (mm)	ID (mm)	Outlet have anti-slip strip
97.0	25.5	47.7	IP68	-----	-----	7.0	4.8	

Dongguan Hai Mi Electronic Technology Limited.

Outside View

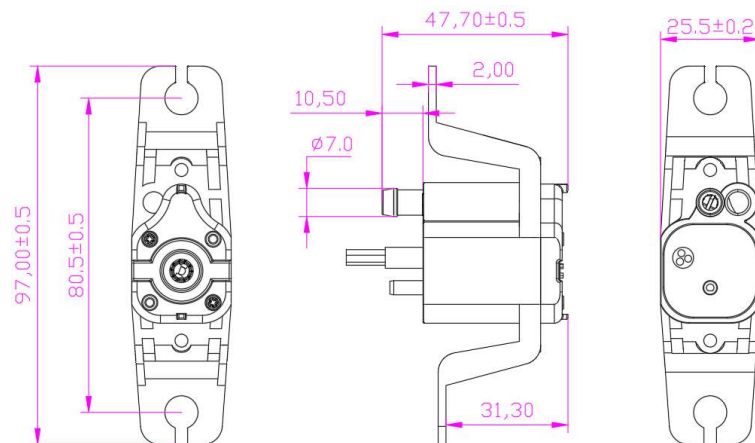

Curve Graph

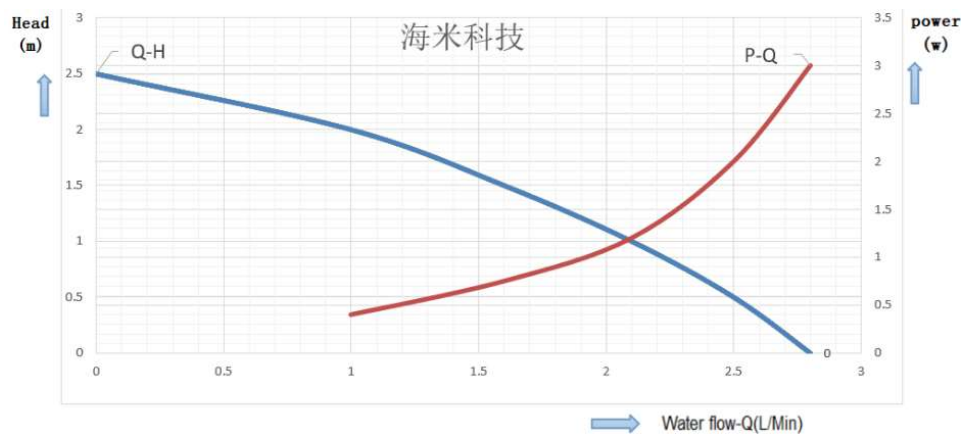

Remarks: The graph is just for your reference, the final one comes with the customer required specifications.

Photo for you reference

